


Gila River Indian Community 2025 AMBIENT AIR MONITORING NETWORK REVIEW AND 2026 PLAN



Gila River Indian Community – District 2 facing south.

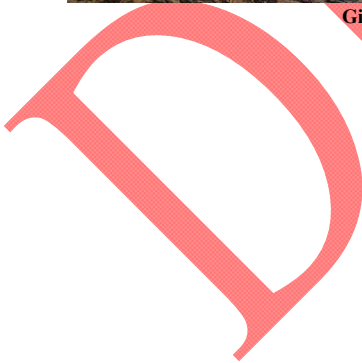

**Gila River Indian Community
Department of Environmental Quality**

**Ambient Air Monitoring Program
June 2026**

Table of Contents

Definition of Terms	1
Abstract	4
1 Introduction	6
2 Air Monitoring Network Design	8
2.1 Monitoring Objectives	8
2.2 Spatial Scales	8
3 Gila River Indian Community Ambient Air Monitoring Network	10
3.1 General.....	10
3.2 Ozone Monitoring Network.....	12
3.2.1 Background.....	12
3.2.2 2025 Monitoring Results Summary	13
3.3 PM10 Particulate Monitoring Network.....	14
3.3.1 Background.....	14
3.3.2 2024 PM ₁₀ Monitoring Results Summary.....	15
3.4 Meteorological Network	16
3.5 Changes to the Network in 2025.....	16
3.6 Proposed Network Changes and Improvements	16
4 Compliance Discussion	17
4.1 Minimum Monitoring Requirements	17
4.2 Data Submission Requirements	19
4.3 Air Quality Data.....	19
4.4 Audits.....	19
5 Public Notice	21
5.1 Public Meeting	21
Appendix A 2024 Air Monitoring Data By Site	23
Appendix B EPA-Required Site Metadata	27
Appendix C EPA Approvals	31
Appendix D Public Notice and Comment Information	34

Figures

Figure 3-1. Map of Ambient Air Monitoring Stations on Gila River Indian Community.....	10
Figure C-1. Approval of O ₃ Seasonal Waiver for St. Johns and Sacaton O ₃ Monitors dated January 14, 2025.	32
Figure C-2. EPA Letter of Approval for GRIC’s 2024 Air Monitoring Network Review and 2025 Plan dated December 5, 2025.	33
Figure D-1. Public Notice Flyer.....	35
Figure D-2. Public Meeting PowerPoint Presentation Slides and Handouts (6 pages):.....	37
Figure D-3. Public Meeting Handout (3 page FAQ Sheet):.....	43

Tables

Table 2-1. Relationship Among Monitoring Site Types And Scales of Representativeness.....	9
Table 3-1. GRIC Ambient Air Monitoring Sites for 2025.....	11
Table 3-2. Ambient Air Quality Parameters Monitored at Each Station.....	11
Table 3-3. National Ambient Air Quality Standards Monitored for Pollutants by GRIC	11
Table 3-4. Site Types for Each Monitoring Station.....	12
Table 3-5. 2025 8-Hour Average Ozone Summary.....	13
Table 3-6. Three-Year Average of 4th Highest 8-Hour Ozone for 2023 - 2025	14
Table 3-7. 2025 24-Hour PM10 Concentrations Above the NAAQS	15
Table 3-8. 2025 24-Hour Average PM10 Summary.....	16
Table 4-1. Ozone Monitoring Requirements for SLAMS (Number of Stations per MSA)	17
Table 4-2. PM10 Monitoring Requirements for SLAMS (Number of Stations per MSA).....	17
Table 4-3. Minimum Monitoring Requirements ¹ for GRIC Ozone Monitors, 2023-2025.....	18
Table 4-4. Minimum Monitoring Requirements ¹ for GRIC PM10 Monitors, 2023-2025	18
Table 4-5. Sources of Ambient Air Quality Data	19
Table 4-6. 2025 Performance Audit Dates for GRIC Ozone Monitors	20
Table 4-7. 2025 Flow Rate Audit Dates for GRIC Continuous TEOM PM10 Monitors.....	20
Table D-1. Summary of comments and questions received from GRIC members and visitors..	46

DEFINITION OF TERMS

AMNR:	Air Monitoring Network Review.
AMNRP:	Air Monitoring Network Review and Plan.
AQMP:	Air Quality Management Plan. The AQMP is a collection of tribal regulations and plans to achieve healthy air quality under the Clean Air Act. For GRIC, the AQMP is synonymous with the Tribal Implementation Plan (TIP).
AQP:	Air Quality Program within the Gila River Indian Community's Department of Environmental Quality.
AQS:	Environmental Protection Agency's Air Quality System
Attainment:	This refers to the NAAQS used to comply with the federal Clean Air Act. After several years of no violations of the NAAQS, the EPA can classify the area as in attainment for that pollutant.
CFR:	Code of Federal Regulations.
Community:	Gila River Indian Community
Continuous monitoring:	A method of monitoring air pollutants that is continually measuring the quantity of the pollutant, either gaseous or particulate. Continuous monitors can be used to obtain real-time or short-term averages of pollutants.
Criteria Pollutants:	Six pollutants (Carbon Monoxide, Lead, Nitrogen Dioxide, Ozone, Particulates, and Sulfur Dioxide) that have NAAQS established by the EPA.
DEQ:	Gila River Indian Community's Department of Environmental Quality
Design Value:	A design value is a statistic that describes the air quality status of a given area relative to the level of the NAAQS. For a concentration-based standard, the air quality design value is simply the standard-related test statistic. The design value of a pollutant monitoring network is the highest sample value in the network used to compare to the NAAQS; e.g. the 8-hour ozone design value for the network is the monitor with the highest 3-year average of the 4 th highest concentrations each year.
EPA:	United States Environmental Protection Agency.
Exceptional Events (EE):	An uncontrollable event caused by natural sources of pollution or an event that is not expected to recur at a given location. The AQP makes the determination of which events to classify as exceptional and those events are then flagged in the AQS. If the EPA concurs with the AQP's determination, the measured pollution event will not be used in determination of compliance with the NAAQS.

FEM:	Federal Equivalent Method. An official method, i.e. equipment and procedure, of monitoring air pollution that has been determined to produce results similar to the Federal Reference Method (FRM).
Filter-based Monitor:	A method of monitoring particulate pollution that involves exposing a pre-weighed filter to a specific flow volume of air to capture the particulates in the air. The filters are then post-weighed to determine the weight of particulates per volume, e.g. $\mu\text{g}/\text{m}^3$. Filter-based monitors used by GRIC are all FRM monitors.
FRM:	Federal Reference Method. An official method (i.e. equipment and procedure) of monitoring air pollution that has been tested and determined to produce results that accurately measure air pollution with acceptable precision. These methods are the baseline that all other methods (i.e., FEMs) refer to.
GRIC:	Gila River Indian Community
$\mu\text{g}/\text{m}^3$:	Micrograms per cubic meter.
MSA:	Metropolitan Statistical Area. A geographical area designated by the federal government based on the concept of a core area with a large population nucleus, plus adjacent communities having a high degree of economic and social integration with that core. It is unclear in Appendix D 40 CFR 58 how MSAs apply to sovereign tribes. Although the areas within the Community are <i>geographically</i> part of the Phoenix-Mesa-Scottsdale MSA, for purposes of the administration of Section 107 of the Clean Air Act (42 U.S.C. § 7407), except where a specific designation has been otherwise made by the Administrator, the air quality control region for the Community is all land within the exterior boundaries of the Community. Therefore, for the purposes of this document, the MSA principle does not apply to the GRIC Air Monitoring Network.
NAAQS:	National Ambient Air Quality Standards. A health and welfare-based standard that is set by the EPA to qualify allowable levels of criteria pollutants.
NO_2:	Nitrogen dioxide.
NO_x:	Nitrogen oxides. Sum of nitric oxide (NO), NO_2 , and other nitrogen-containing compounds.
PM:	Particulate matter. Material suspended in the air in the form of minute solid particles or liquid droplets.
PM_{10}:	Particulate matter of 10 microns in diameter or smaller.
PMA:	Phoenix Metropolitan Area.
NPAP-TTP:	National Performance Audit Program – Through the Probe
POC:	Parameter Occurrence Code is an identification number distinguishing multiple instruments that may measure the same pollutant.

PPM:	Parts per million.
Primary Standard:	One portion of the NAAQS. These standards are designed to protect the public health.
Secondary Standard:	One portion of the NAAQS. These standards are designed to protect the environment.
SIP:	State Implementation Plan. SIPs are a collection of state and local regulations and plans to achieve healthy air quality under the Clean Air Act.
SLAMS:	State and Local Air Monitoring Station. The SLAMS consist of a network of approximately 5,000 monitoring stations nationwide whose size and distribution is largely determined by the needs of State, and local air pollution control agencies to meet their respective SIP requirements. The GRIC monitors operated by the AQP are not part of the SLAMS network, but the AQP operates the monitors in accordance with the requirements for SLAMS.
TAR:	Tribal Authority Rule.
TEOM:	Tapered Element Oscillating Microbalance. A continuous particulate measuring instrument used by the AQP to measure PM10.
TIP:	Tribal Implementation Plan. The TIP is a collection of tribal regulations and plans to achieve healthy air quality under the Clean Air Act. For GRIC, the TIP is incorporated into and synonymous with the Air Quality Management Plan (AQMP).
VOC:	Volatile organic compounds. VOCs are chemical compounds that can easily vaporize and enter the atmosphere. There are many natural and artificial sources of VOCs; solvents and gasoline make up some of the largest artificial sources. VOCs will react with NO _x in the presence of sunlight to create ground-level ozone pollution.

ABSTRACT

In 2025, Gila River Indian Community (GRIC) Department of Environmental Quality (DEQ) Air Quality Program (AQP) successfully continued to operate an air quality surveillance system that monitored for regulated ambient air pollutants as per 40 CFR Parts 50 and 58. This Annual Monitoring Network Review and Plan (AMNRP) documents how the system performed during 2025. The air monitoring data produced are intended for regulatory compliance determinations regarding regulated ambient air pollutants.

In addition, this document describes the changes that are planned to occur within the next 18 months. The AQP informs the Environmental Protection Agency's Region 9 (EPA R9) office of any significant data collection interruptions immediately.

During 2025, there were no significant changes to the GRIC air monitoring network; however, some notable accomplishments are as follows:

- GRIC received approval for a seasonal ozone waiver from EPA for 2025 calendar year. GRIC will monitor ozone from April 1st through October 31st in 2025.
- GRIC successfully completed and certified the 2024 air monitoring data with 98-100% data completeness reporting to EPA's AQS data repository.
- GRIC continued to work closely with the auditors and Region 9 Monitoring & Analysis Section management staff to address all comments and recommendations from the 2024 TSA conducted by EPA Region 9, Monitoring & Analysis Section.
- GRIC coordinated with Community departments to remove three trees near the St. Johns Monitoring Station. These trees were identified in the TSA from 2024 as not meeting Appendix E siting criteria.
- GRIC submitted letter to EPA Region 9 requesting a seasonal waiver for 2026 calendar year, requesting to monitor for ozone from April 1st through October 31st in 2026.
- The EPA Region 9 QA (Quality Assurance) Branch conditionally approved the GRIC Air Monitoring Quality Assurance Project Plan (QAPP) Volume 3 (O₃ Monitoring). EPA provided verbal notification of the conditional approval, but was unable to provide GRIC with comments and recommendations to complete final approval at this time.

In 2026, there are no significant changes planned for the air monitoring network. Some notable activities that have occurred or are planned in 2026 are as follows:

- GRIC received approval for a seasonal ozone waiver from EPA for 2026 calendar year. GRIC will monitor ozone from April 1st through October 31st in 2026.
- GRIC successfully completed and certified the 2025 air monitoring data with 95-100% data completeness reporting to EPA's AQS data repository.
- GRIC will submit proposed Corrective Action Plans (CAPs) in response to the 2024 TSA to EPA Region 9 for approval. Plan to have all changes covered in the CAPs implemented by end of the year as well.
- GRIC will submit letter to EPA Region 9 requesting a seasonal waiver for 2027 calendar year, requesting to monitor for ozone from April 1st through October 31st in 2027.

- GRIC will continue the QAPP approval process and work with EPA Region 9 until the QAPP (one document split into four volumes) is fully approved.
- GRIC purchased new ozone and PM10 monitoring equipment. These instruments are newer versions of the same model of the existing instruments. GRIC has installed new Teledyne Advanced Pollution Instrumentation (TAPI) T400 Photometric Ozone Analyzers at both ozone sites and plans on replacing existing Thermo Fisher Scientific Tapered Element Oscillating Microbalance (TEOM) 1405 Ambient Particulate Monitors at all sites.

The GRIC air monitoring network and tools operated in 2025 meet the necessary requirements as mandated by Federal regulations. Except where otherwise noted, each monitor meets the requirements of 40 CFR 58 Appendices A, C, D, and E, where applicable. This Annual Network Plan documents the details of the regulatory ambient air quality monitors.

DRAFT

1 INTRODUCTION

The Code of Federal Regulations (CFR) Title 40 Part 58.10 (40 CFR 58.10) requires an annual monitoring network plan to summarize the air quality surveillance system consisting of State and Local Air Monitoring Stations (SLAMS) and Special Purpose Monitors (SPM) operated under state and local authorities. The annual monitoring network plan must identify the purpose of each monitor and provide evidence that both the siting and the operation of each monitor meet the requirements in 40 CFR Part 58 Appendices A, C, D, and E below:

- Appendix A Quality Assurance Requirements for Monitors used in Evaluations of National Ambient Air Quality Standards
- Appendix C Ambient Air Quality Monitoring Methodology
- Appendix D Network Design Criteria for Ambient Air Quality Monitoring
- Appendix E Probe and Monitoring Path Siting Criteria for Ambient Air Quality Monitoring

This AMNRP meets the federal regulatory requirements set forth in 40 CFR 58.10 and Appendices A, C, D, and E.

The Gila River Indian Community (GRIC or Community) Department of Environmental Quality (DEQ) Air Quality Program (AQP) operates air quality monitors that record ambient concentrations of two criteria pollutants - particulate matter less than or equal to 10 microns (PM₁₀) and ozone (O₃). Criteria pollutants are those that the United States Environmental Protection Agency (EPA) has defined as a potential risk to health, and correspondingly defined a National Ambient Air Quality Standard (NAAQS). The NAAQS are intended to protect public health and welfare by setting limits on the allowable level of each pollutant in the ambient air. The other criteria pollutants with established NAAQS that are not monitored by the AQP are particulate matter less than or equal to 2.5 microns (PM_{2.5}), carbon monoxide (CO), sulfur dioxide (SO₂), nitrogen dioxide (NO₂), and lead (Pb). GRIC does not monitor for these pollutants because they have been found, through discrete sampling and emission inventory, to be at background ambient air quality concentrations. Additionally, GRIC does not have major stationary pollution sources that emit these particular criteria pollutants that may affect the NAAQS within GRIC jurisdictions.

The GRIC air quality monitors are Tribal Monitors and are most closely related to SLAMS monitors. The United States Environmental Protection Agency (EPA) works closely with GRIC to adhere to the requirements for SLAMS networks with appropriate flexibility as stated in the Tribal Authority Rule (TAR).

The purpose of this document is to fulfill the requirements of 40 CFR 58.10, and has been prepared in accordance with *Annual Monitoring Network Plan* checklists and guidance documents provided by EPA. Therefore, this document contains the following sections:

- **Air Monitoring Network Design** – Describes the design requirements for an air monitoring network in accordance with Appendix D of 40 CFR 58.
- **GRIC Air Monitoring Network** – Describes the air monitoring network for the Community including monitor types, background information, summary of 2025 monitoring results, changes to the monitoring network in 2025, and proposed changes to the monitoring network.

- **Compliance Discussion** – Includes a discussion of compliance with 40 CFR 58, including a table of requirements for Network Review, minimum monitoring requirements, precision and accuracy certifications, data submittals, and audits.
- **Public Notice** – Includes information on public notices and community outreach for review and presentation of this document.
- **Appendices** – Contains the detailed monitoring site information and photographs, and a copy of the presentation that was prepared for the public outreach.

DRAFT

2 AIR MONITORING NETWORK DESIGN

2.1 Monitoring Objectives

Appendix D of 40 CFR 58 states that monitoring networks must be designed to meet three basic monitoring objectives:

1. Provide air pollution data to the general public in a timely manner;
2. Support compliance with ambient air quality standards and emissions strategy development; and
3. Support air pollution research studies.

Furthermore, Appendix D states that in order to support air quality management work indicated in the three basic objectives above, monitoring networks must be designed with a variety of the following types of monitoring sites:

- Highest Concentration – Sites to determine the highest concentration expected to occur in the area covered by the network;
- Population Exposure – Sites to determine representative concentrations in areas of high population density;
- Source Impacts – Sites to determine the impact on ambient pollution levels of significant sources or source categories;
- Background Concentrations – Sites to determine general background concentration levels;
- Regional Transport – Sites to determine the extent of regional pollutant transport among populated areas, and in support of secondary standards; and
- Welfare Impacts – Sites to determine the welfare-related impacts in more rural and remote areas (such as visibility impairment and effects on vegetation).

2.2 Spatial Scales

The goal in designing a monitoring network is to establish monitoring stations that will provide data to meet the above monitoring objectives. The physical siting of the air monitoring station must achieve a spatial scale of representativeness that is consistent with the monitoring site type, air pollutant to be measured, and the monitoring objective. The spatial scale results from the physical location of the site with respect to the pollutant sources and categories by estimating the size of the area surrounding the monitoring site that experiences uniform pollutant concentrations. The categories of spatial scale are:

- Micro Scale - Defines the concentrations in air volumes associated with area dimensions ranging from several meters up to about 100 meters.
- Middle Scale – Defines the concentration typical of areas up to several city blocks in size with dimensions ranging from about 100 meters to 0.5 kilometer.

- Neighborhood Scale – Defines concentrations within some extended area of the city that has relatively uniform land use with dimensions in the 0.5 to 4.0 kilometers range. The neighborhood and urban scales listed below have the potential to overlap in applications that concern secondarily formed or homogeneously distributed air pollutants.
- Urban Scale – Defines concentrations within an area of city-like dimensions, on the order of 4 to 50 kilometers. Within a city, the geographic placement of sources may result in there being no single site that can be said to represent air quality on an urban scale.
- Regional Scale – Defines usually a rural area of reasonably homogeneous geography without large sources, and extends from tens to hundreds of kilometers.

The appropriate spatial scale for each of the monitoring site types is shown in Table 2-1.

Table 2-1. Relationship Among Monitoring Site Types And Scales of Representativeness.

Monitoring Objective	Appropriate Spatial Scale				
	Micro	Middle	Neighborhood	Urban	Regional
Highest concentration	X	X	X	X	
Population Exposure			X	X	
Source Impacts	X	X	X		
Background Concentrations			X	X	X
Regional Transport				X	X
Welfare Impacts				X	X

3 GILA RIVER INDIAN COMMUNITY AMBIENT AIR MONITORING NETWORK

3.1 General

There are currently three permanent ambient air monitoring stations within the Community – Sacaton, Casa Blanca, and St. Johns (see Figure 3-1). All three monitoring stations are Tribal Monitors, but follow the requirements of SLAMS networks with appropriate flexibility as stated in the TAR.

Figure3-1. Map of Ambient Air Monitoring Stations on Gila River Indian Community

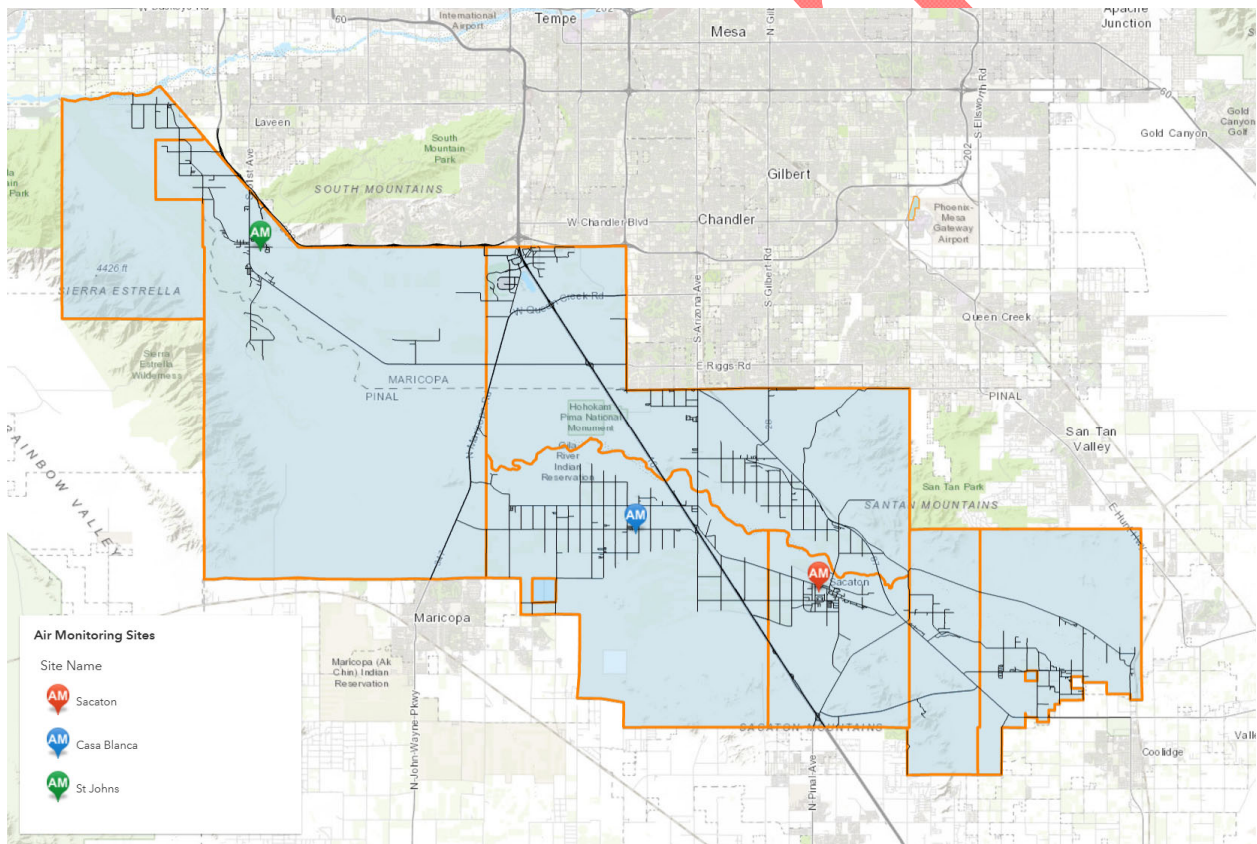


Table 3-1 lists the details regarding each monitoring site’s GRIC abbreviation symbol and EPA’s AQS identification number. Detailed site information provided in Appendix A includes photographs, site type, spatial scale, and population represented. In addition, Appendix B provides detailed monitoring technical specifications.

Table 3-1. GRIC Ambient Air Monitoring Sites for 2025

Name	GRIC Abbreviation	AQS ID
St. Johns	SJ	TT-614-7003 (Tribal Monitor)
Sacaton	Sac	TT-614-7001 (Tribal Monitor)
Casa Blanca	CB	TT-614-7004 (Tribal Monitor)

Table 3-2 lists these stations, the pollutants and meteorological parameters that are monitored at each location.

Table 3-2. Ambient Air Quality Parameters Monitored at Each Station

Parameter	Monitoring Station		
	St. Johns	Casa Blanca	Sacaton
Ozone	X		X
PM ₁₀	X	X	X
Wind Speed	X	X	X
Wind Direction	X	X	X
Ambient Temperature	X	X	X
Ambient Barometric Pressure	X	X	X
Precipitation	X	X	X
Relative Humidity	X	X	X
Camera (Visibility)	X	X	X

Table 3-3 shows the NAAQS for pollutants that are currently monitored by GRIC, including ozone and PM₁₀. Additional pollutants for which EPA has established NAAQS and that are not currently monitored by GRIC include SO₂, NO₂, CO, PM_{2.5}, and Lead. GRIC continues to not have significant concerns with these additional pollutants as described within the *Introduction* section of this document. EPA periodically reviews and revises these standards based on new public health and scientific information. These revisions often require changes to air monitoring networks and methodologies.

Table 3-3. National Ambient Air Quality Standards Monitored for Pollutants by GRIC

Pollutant	Primary/ Secondary	Averaging Time	Level	Form
Ozone	primary and secondary	8-hour	0.070 PPM	Annual fourth-highest daily maximum 8-hr concentration, averaged over 3 years
PM ₁₀	primary and secondary	24-hour	150 µg/m ³	Not to be exceeded more than once per year on average over 3 years

The site types represented by each GRIC air quality monitor are shown in Table 3-4.

Table 3-4. Site Types for Each Monitoring Station

Site Type	Ozone		Particulate Matter ≤10 Microns (PM ₁₀)		
	St. Johns	Sacaton	St. Johns	Casa Blanca	Sacaton
Highest Concentration	X			X	
Population Exposure	X	X	X	X	X
Source Impacts				X	
Background Concentrations	X	X	X	X	X
Regional Transport	X	X	X	X	X
Welfare Impacts					

Detailed site information for each of the monitoring locations is presented in Appendix A.

3.2 Ozone Monitoring Network

Beginning in 2002, the Community started monitoring for ozone at two locations - one in Sacaton (District 3) and one in St. Johns (District 6); both monitors operated on seasonal schedule from April through October.

The GRIC ozone monitoring network operated a year round schedule from January 1, 2016 through December 31, 2018. Both ozone monitors were reported as operational in AQS from January 1 to December 31, 2025.

GRIC requested and received EPA-approval for a waiver to monitor ozone only on seasonal schedule (April – October) beginning April 1, 2019; GRIC continues to request annually and receive approval for a waiver which currently continues through 2026 calendar year.

3.2.1 Background

The following subsections provide background information on the two ozone monitoring locations. Additional detailed information for each monitor is provided in Appendix B.

3.2.1.1 Sacaton

Operated by the AQP since 2002, this site provides background and regional transport ozone monitoring on an urban scale. This site is located near the central GRIC government and business district of Sacaton, which includes four schools and a community hospital. It also provides a measurement of representative area ozone concentration for the community of Sacaton and surrounding areas. The monitor generally measures background levels of ozone during prevailing West or East winds. However, under certain wind conditions, the monitor can also detect ozone and ozone precursor transport from the Phoenix Metropolitan Area (PMA), north of the Community, in the form of elevated ozone readings. Measured concentrations at this site are often similar to those recorded at Pinal County’s Casa Grande monitor (approximately 9 miles south of Sacaton).

3.2.1.2 St. Johns

Initially operated by the AQP at Vee Quiva Casino (AQS Site ID 7002) in 2002 and then relocated 2 miles south to Gila Crossing Community School Administrative Campus (AQS ID TT-614-7003) in 2003. In July 2018, site was temporarily relocated to the Komatke Health Clinic as the Gila Crossing Community School Administrative Campus was re-constructed as the new Gila Crossing Community School (grades K-8). The site was then moved permanently onto the new Gila Crossing Community School campus in August 2019. This site is located in District 6 on the southwest side of the South Mountain Range near the City of Phoenix and provides background and regional transport ozone monitoring on an urban scale. Ozone concentrations at this site exhibit strong diurnal fluctuations caused by oxides of nitrogen (NO_x) and volatile organic compounds (VOC) from nearby neighboring jurisdictions in the PMA. The monitor generally measures background levels of ozone during prevailing West or East winds. However, under certain wind conditions, the monitor can also detect ozone and ozone precursor transport from the PMA, north and east of the monitor location, in the form of elevated ozone readings.

3.2.2 2025 Monitoring Results Summary

The 1-hour average ozone standard was revoked by the EPA on June 15, 2005, and has been replaced by the 8-hour average standard for compliance purposes. On March 12, 2008, the EPA lowered the eight-hour ozone NAAQS from 0.080 to 0.075 ppm.

On October 1, 2015, the EPA lowered the eight-hour ozone NAAQS from 0.075 to 0.070 ppm. Compliance with the standard is determined by averaging the 4th highest of the daily maximum eight-hour average over a three-year period. This three-year average must be less than or equal to 0.070 ppm.

In 2025, there were zero days where the daily maximum 8-hour ozone average exceeded the NAAQS (0.070 PPM standard) within the GRIC ozone network.

The 2025 fourth highest value was 0.067 ppm for Sacaton and 0.065 ppm for St. Johns. Table 3-5 presents the four highest 8-hour average ozone readings for each monitor during the 2025 monitoring season (April – October).

Table 3-5. 2025 8-Hour Average Ozone Summary

Site	Max (PPM) Date	2nd High (PPM) Date	3rd High (PPM) Date	4th High (PPM) Date	Number of Days >0.070
St Johns	0.067 5/8/2025	.067 5/10/2025	0.066 5/20/2025	0.065 4/9/2025	0
Sacaton	0.070 8/22/2025	0.070 8/26/2025	0.068 4/9/2025	0.067 4/8/2025	0

The 8-hour average NAAQS for ozone is violated when the three-year average of the fourth highest

values for each year is greater than 0.070 PPM); the EPA defines these as the Design Values. As of the date of this report, the EPA has not issued an official concurrence with GRIC’s 2023 and 2024 flagged data. Therefore, a determination of compliance with the 8-hour O₃ NAAQS cannot be made at this time. The fourth highest 8-hour average ozone reading for each of the past three years and the 3-year average is shown in Table 3-6. The statistical design values for the Sacaton and St Johns sites are 0.070 ppm and 0.069 ppm, respectively. There are exceptional events within this 3 year period that have contributed to the design value.

Table 3-6. Three-Year Average of 4th Highest 8-Hour Ozone for 2023 - 2025

Site	2023 4 th High (PPM)	2024 4 th High (PPM)	2025 4 th High (PPM)	3-Year Average of 4 th High (PPM)
St Johns	0.071*	0.072	0.065	0.069*
Sacaton	0.073	0.072*	0.067	0.070*

* Includes data flagged as exceptional events

3.3 PM₁₀ Particulate Monitoring Network

Beginning in 2002, the Community started monitoring for PM₁₀ at one location (Casa Blanca) using a Federal Reference Method (FRM), filter-based, monitor operating on a 1-in-3 day schedule. In 2013, the Community began continuous monitoring methods for PM₁₀ at all three monitoring stations (St. Johns, Casa Blanca, and Sacaton) using Federal Equivalent Method (FEM) Tapered Element Oscillating Microbalance (TEOM) monitors that provide hourly PM₁₀ averages. In 2025, all three TEOM FEM monitors were reported as operational in AQS. There are no collocation requirements for EPA-approved PM₁₀ FEM continuous monitors.

3.3.1 Background

The following subsections provide background information on the three PM₁₀ monitoring locations. Additional detailed information for each monitor is provided in Appendix B of this document.

3.3.1.1 Casa Blanca

This site has been operated by the AQP since 2002. This monitoring site is a neighborhood scale and representative of particulate concentrations in District 5, Casa Blanca. The site consists of one TEOM monitor. Since there are no collocation requirements for EPA-approved PM₁₀ FEM monitors, the two collocated FRM samplers (two identical monitors that sample separately) were discontinued on December 31, 2014.

This monitoring site was originally placed in one of the three most populated areas of the Community to measure source impacts from agricultural areas. Although located in a neighborhood of agricultural operations, it can be representative of other areas beyond the local jurisdictions. This monitoring station is located approximately 4 to 5 miles northeast of other PM₁₀ sources (e.g., agricultural areas and dairy operations) that are outside of the Community’s boundaries and control, and may be influenced by PM₁₀ generated from those sources.

3.3.1.2 Sacaton and St. Johns

The Sacaton and St. Johns sites started reporting PM₁₀ data to the AQS database beginning January 1, 2013. Both sites are currently set up to monitor PM₁₀ concentrations using continuous TEOM monitors. These two sites have been approved for monitoring and reporting as established within the GRIC Quality Assurance Project Plan (QAPP). The St. Johns site is located in the Phoenix PM₁₀ Nonattainment Area.

3.3.2 2024 PM₁₀ Monitoring Results Summary

The 24-hour Primary standard for PM₁₀ is 150 µg/m³ (155 µg/m³ with mathematical rounding). The interpretation of the standard, Appendix K to Part 50, includes rounding to the nearest 10 µg/m³ (*i.e.*, values ending in 5 or greater are to be rounded up). This standard is violated when the expected number of exceedances at a monitor is more than one per year on average over three years. A formula, as detailed in 40 CFR 50, is used to determine the expected number of exceedances. The formula takes into account the number of days sampling occurred and the number of valid samples collected. A three-year average of these estimated days is then used to determine compliance.

In 2025, there were 10 exceedances of the 24-hour primary standard (NAAQS) for PM₁₀. There were six exceedances at the Sacaton site and two exceedances at both the Casa Blanca and St. John sites as shown in Table 3-7 below.

Table 3-7. 2025 24-Hour PM₁₀ Concentrations Above the NAAQS

Date	Concentration (µg/m ³)		
	Sac	CB	SJ
1/8/25	604	353	
3/13/25		214	
7/1/25	272	266	241
8/10/25		160	
8/21/25		218	
8/25/25		353	
9/3/25			450

GRIC has flagged these exceedances as exceptional events (see Definition of Terms). In accordance with the EPA's Exceptional Events Policy, once approved, these data are not used in determining compliance with the NAAQS. Table 3-8 presents the summary of the 24-hour average PM₁₀ readings for each monitor in 2025.

Exceedances of the 24-hour PM₁₀ NAAQS at the GRIC monitors also occurred in 2023 and 2024 which also included some flagged data due to Exceptional Events (EE) by GRIC. As of the date of this report, the EPA has not issued an official concurrence with GRIC's 2023 and 2024 flagged data. Therefore, a determination of compliance with the 24-hour PM₁₀ NAAQS cannot be made at this time.

Table 3-8. 2025 24-Hour Average PM10 Summary

Site Name (Monitor Type)	24-hr Average 1 st Max ($\mu\text{g}/\text{m}^3$)	24-hr Average 2 nd Max ($\mu\text{g}/\text{m}^3$)	Number of 24-hr NAAQS Exceedances	Estimated Exceedances (Including EEs requested)	Annual Average ($\mu\text{g}/\text{m}^3$)	No. of EEs	No. of valid days / days possible
St Johns (TEOM-POC1)	450* 9/03/2025	241* 7/01/2025	2*	2*	30.0‡	2	347 / 365
Sacaton (TEOM-POC1)	604* 1/08/2025	272* 7/01/2025	2*	2*	35.3‡	2	365 / 365
Casa Blanca (TEOM-POC3)	353* 1/08/2025	353* 8/25/2025	6*	6*	43.5‡	6	360 / 365
* Data has been flagged by GRIC as an exceptional event; RJ flag for high winds ‡ The annual average values include exceptional events data that has not been concurred by EPA.							

3.4 Meteorological Network

GRIC collects meteorological data at all three air monitoring sites to support the analysis of ambient air quality data and to provide support for EE reporting.

3.5 Changes to the Network in 2025

No changes were made to the monitoring network design or instrument siting in 2025.

3.6 Proposed Network Changes and Improvements

There are no planned changes to siting of the GRIC Air Monitoring Network in 2026. The AQP is planning or has made the following changes to the air monitoring network in 2026:

- The AQP has received funding to replace existing TEOMs, ozone monitors and ozone calibrators with newly manufactured equipment (same models) at all sites. The ozone monitors and calibrators were replaced prior to the April 1, 2025 (start of the 2026 ozone season). The TEOMs will be replaced in late 2026.
- The GRIC ozone monitors will continue on a seasonal schedule from April 1, 2026 through October 31, 2026. The AQP will continue to request for seasonal ozone monitoring for 2027 calendar year; a formal request with data analysis will be submitted to EPA in 2026.

4 COMPLIANCE DISCUSSION

In accordance with 40 CFR 58.10(a)(1), the following sections provide information on compliance with the requirements of Appendices A, C, D, and E of 40 CFR 58. A cross-reference of the requirements of Appendices A, C, D, and E of 40 CFR 58 and the section(s) of this report that address those requirements is included in tables provided in Appendix B of this document for all three GRIC air monitoring sites.

4.1 Minimum Monitoring Requirements

Tables D-2 and D-4 in Appendix D of 40 CFR Part 58 define minimum monitoring requirements for ozone and PM₁₀, respectively. Tables D-2 and D-4 are reproduced as Tables 4-1 and 4-2, respectively, below. The minimum monitoring requirements are based on the population of the Metropolitan Statistical Area (MSA) and the design value for each NAAQS. MSA must contain an urbanized area of 50,000 or more populations.

Table 4-1. Ozone Monitoring Requirements for SLAMS (Number of Stations per MSA)

MSA Population	Most recent 3-year design value ≥85% NAAQS	Most recent 3-year design value <85% NAAQS
>10 million	4	2
4-10 million	3	1
350,000-<4 million	2	1
50,000-<350,000	1	0

Table 4-2. PM10 Monitoring Requirements for SLAMS (Number of Stations per MSA)

MSA Population	High concentration Exceeds NAAQS by 20% or more (>180 µg/m ³)	Medium concentration >80% of NAAQS (>120 µg/m ³)	Low concentration < 80% of NAAQS (<120 µg/m ³)
>1,000,000	6-10	4-8	2-4
500,000-1,000,000	4-8	2-4	1-2
250,000-500,000	3-4	1-2	0-1
100,000-250,000	1-2	0-1	0

It is unclear in Appendix D 40 CFR 58 how MSAs and the minimum monitoring requirements in Tables D-2 and D-4 (Tables 4-1 and 4-2) apply to sovereign tribes. Although the areas within the Community are *geographically* part of the Phoenix-Mesa-Scottsdale MSA, for purposes of the administration of Section 107 of the Clean Air Act (42 U.S.C. § 7407), except where a specific designation has been otherwise made by the Administrator, the air quality control region for the Community is all land within the exterior boundaries of the Community. Therefore, for the purposes of this document, the AQP is using the data in Tables D-2 and D-4 as reference only. The design value is a calculated value based upon the highest recorded concentration at a site in the attainment or nonattainment area. The process for computing the design value for each criteria pollutant is described in the appendices of 40 CFR Part 50. For the purpose of this document, the design values

listed are the highest calculated concentrations recorded in the Community.

The minimum monitoring requirements of 40 CFR 58 Appendix D for the ozone and PM₁₀ monitors within the Community are presented in Tables 4-3 and 4-4, respectively. The GRIC Air Quality Management Plan (AQMP) does not require a minimum number of monitors for the Community.

Table 4-3. Minimum Monitoring Requirements¹ for GRIC Ozone Monitors, 2023-2025

MSA	Monitor Site: County	Population ² (GRIC Census)	8-hour Design Value for 2023-2025 (ppm)	Site (AQS ID)	Minimum Monitors Required	Number of Active Monitors	Monitors Needed
NA ¹	St. Johns: Maricopa	13,639	0.069 ^A 0.068 ^B	St. Johns (TT-614-7003)	0 ^C	2	0
	Sacaton: Pinal		0.070 ^A 0.068 ^B	Sacaton (TT-614-7001)			

Table Notes:

1. It is unclear in Appendix D 40 CFR 58 how MSAs apply to Tribal agencies. Although the areas within the Community are *geographically* part of the Phoenix-Mesa-Scottsdale MSA, for purposes of the administration of Section 107 of the Clean Air Act (42 U.S.C. § 7407), the air quality control region for the Community is all land within the exterior boundaries of the Community. Therefore, for the purposes of this document, the MSA is not applicable to GRIC.
2. Number of members who reside within GRIC, 12/31/2025 (GRIC Enrollment/Census Department).
- A. 2023, 2024, and 2025 data DV includes exceptional events (e.g., regional wildfire smoke event) data requested for regulatory concurrence.
- B. 2023, 2024, and 2025 data DV excludes exceptional events (e.g., regional wildfire smoke event) data requested for regulatory concurrence.
- C. A 3-year design value greater than 0.0595 would require one monitor for a population between 50,000 and 350,000 (smallest population group in Table 4-2). Since the GRIC population is below the lowest population range in Table 4-2 and Tribal requirements are unclear, the minimum monitoring requirements was assumed to be zero. For comparison, the population of the Phoenix-Mesa-Scottsdale MSA in 2017 estimate was 4,737,270 residents (Census Bureau), which would require a minimum of 3 monitors.

Table 4-4. Minimum Monitoring Requirements¹ for GRIC PM₁₀ Monitors, 2023-2025

MSA	Monitor Site: County	Population ² (GRIC Census)	GRIC Max 24- hour Average Concentration (µg/m ³)	Site (AQS ID)	Minimum Monitors Required	Number of Active Monitors	Monitors Needed
NA ¹	St. Johns: Maricopa	13,639	604 ^A 148 ^B	St Johns (TT-614-7003 POC1)	0 ^C	3	0
	Sacaton: Pinal			Sacaton (TT-614-7001 POC1)			
	Casa Blanca: Pinal			Casa Blanca (TT-614-7004 POC3)			

Table Notes:

1. It is unclear in Appendix D 40 CFR 58 how MSAs apply to Tribal agencies. Although the areas within the Community are *geographically* part of the Phoenix-Mesa-Scottsdale MSA, for purposes of the administration of Section 107 of the Clean Air Act (42 U.S.C. § 7407), the air quality control region for the Community is all land within the exterior boundaries of the Community. Therefore, for the purposes of this document, the MSA is not applicable to GRIC.
2. Number of members who reside within GRIC, 12/31/2025 (GRIC Enrollment/Census Department).
- A. Max concentration includes data flagged as exceptional events. Sacaton site, 1/18/2025.
- B. Max concentration excludes data flagged as exceptional events. Casa Blanca site, 2/11/2025.
- C. A maximum concentration greater than 180 µg/m³ would require 1-2 monitors for a population between 100,000 and 250,000 (smallest population group in Table 4-2). A maximum concentration between 120 and 180 µg/m³ would require 0-1 monitors for a population between 100,000 and 250,000. Since the GRIC population is below the lowest population range in Table 4-2 and Tribal requirements are unclear, the minimum monitoring requirements was assumed to be zero. For comparison, the estimated population of the Phoenix-Mesa-Scottsdale MSA in 2017 was 4,737,270 (Census Bureau), which would require a minimum of 6-10 monitors for maximum concentrations >180 µg/m³ and 4-8 monitors for maximum concentrations between 120 and 180 µg/m³.

Based on the information contained in Tables 4-3 and 4-4, the GRIC monitoring network meets the minimum monitoring requirements for all criteria pollutants measured (i.e., ozone and PM₁₀) as established in 40 CFR 58 Appendix D, Tables D-2 and D-4.

4.2 Data Submission Requirements

Federal regulations (Appendix A of 40 CFR 58 and 40 CFR 58.15) require air monitoring organizations to submit precision and accuracy data for the data reported to the federal database. The air monitoring precision and accuracy data for the GRIC monitors are submitted to the EPA AQS database on a quarterly basis and are up to date as of the publication of this report.

Federal regulations (40 CFR 58.15) also require the air monitoring organization to annually submit a letter certifying that data has been submitted for that year to the EPA AQS database and that the data accurately represents the air quality in the Community. The AQP certified and submitted the 2025 air monitoring data for the Community to EPA Region 9, Air Quality Analysis Office on April 15, 2026, via Email.

4.3 Air Quality Data

All of the GRIC ambient air monitoring stations are registered with the EPA and regularly report NAAQS criteria pollutant data to the EPA's AQS database. The data generated at these stations are public information and are available in various formats from the respective agencies. Table 4-5 below lists some popular sources for air quality data.

Table 4-5. Sources of Ambient Air Quality Data

Agency	Address For Data Requests	Email / Internet address	Data Available
GRIC	P.O. Box 2139 Sacaton, AZ, 85147 Attn: GRIC DEQ Director	Lisa.Gover.DEQ@gric.nsn.us	GRIC Air Monitoring Data
United States Environmental Protection Agency	Ariel Rios Building 1200 Pennsylvania Avenue, N.W. Washington, DC 20460	www.epa.gov ; www.epa.gov/outdoor-air-quality-data ; https://aqs.epa.gov/aqsweb/documents/data_mart_welcome.html	National Air Monitoring Data, including GRIC data

4.4 Audits

The AQP performed audits of the monitoring equipment in 2025. The performance audit dates for the ozone monitors are shown in Table 4-6 and the semi-annual audits dates for the continuous TEOM PM₁₀ monitors are shown in Table 4-7. In addition, this information is included in Appendix B that provides detailed information of air monitoring specifications.

The GRIC network also participates in the National Performance Audit Program that is conducted by the EPA. An NPAP was conducted on 5/7/2025 at the Sacaton site for ozone and the ozone monitor passed all audit points.

Table 4-6. 2025 Performance Audit Dates for GRIC Ozone Monitors

Site	AQS ID	Parameter	2025 Audit Dates
Sacaton	TT-614-7001 (Tribal Monitor)	Ozone (44201)	6/19, and 10/9
St Johns	TT-614-7003 (Tribal Monitor)	Ozone (44201)	6/25, and 10/10

Table 4-7. 2025 Flow Rate Audit Dates for GRIC Continuous TEOM PM10 Monitors

Site	AQS ID	Parameter	2025 Audit Dates
Sacaton (TEOM)	TT-614-7001 (Tribal Monitor)	PM ₁₀ (81102)	3/12, 6/19, and 10/9
St. Johns (TEOM)	TT-614-7003 (Tribal Monitor)	PM ₁₀ (81102)	3/12, 6/25, and 10/10
Casa Blanca (TEOM)	TT-614-7004 POC3 (Tribal Monitor)	PM ₁₀ (81102)	3/25, 6/27, and 10/24

5 PUBLIC NOTICE

In accordance with 40 CFR 58.10, the annual monitoring network plan must be made available for public inspection (website, hardcopy posting in libraries and public offices, and/or newspaper listing) for at least 30 days prior to submission to EPA. If an opportunity for public comment is provided, comments received must be included in the annual network plan submission.

The Gila River Indian Community DEQ presented a summary of this Network Review during District meetings beginning on May 4, 2026. In an effort to notify the public of the Network Review, the AQP published information through the following outlets:

- Public Notice posted on the GRIC DEQ website (www.gricdeq.org/index.php/education--outreach/public-notices).
- Public Notice posted in the Gila River Indian Newspaper, a newspaper of general circulation in Gila River Indian Community, and by Gila River Broadcast Corporation (GRBC).
- Public Notice posted on the GRIC Government Intranet and Gila River Indian Community Facebook page.

A copy of the public announcement and handouts were posted on the GRIC DEQ website and comments and questions received are included in Appendix D.

5.1 Public Meeting

The AQP presented a summary of the content of this document during the District meetings from May through June 2026. A copy of the public announcement and handouts are included as Appendix D. The comments and questions received are included in Appendix D.


Appendix A 2024 Air Monitoring Data By Site

(Site information includes: photographs, site type and spatial scale, and population represented.)

- St. Johns
- Sacaton
- Casa Blanca

DRAFT

St. Johns (SJ), TT-614-7003 (Tribal Monitor)

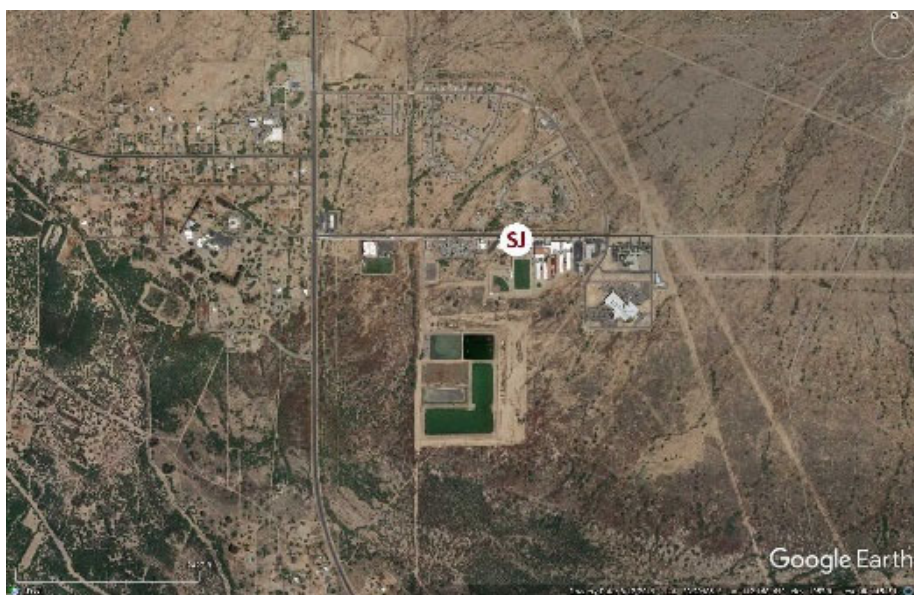

Location: 4665 W. Pecos Rd,
Laveen Village, AZ 85339

Spatial Scale: Urban (O₃) and
Neighborhood (PM₁₀)

Monitoring Type: Population
Exposure, Highest
Concentration (O₃)

Site Description: This site has been operational since 2003. This site is located on the Gila Crossing Community School campus. This Tribal Monitoring location monitors for ozone and PM₁₀. The spatial scale for the St. Johns site is *Neighborhood* for PM₁₀ and *Urban Scale* for ozone. It is located in a residential area. This site operates one gaseous ozone analyzer and one continuous PM₁₀ monitor that are both FEM instruments. Meteorological monitors operating at this site include: ambient temperature, barometric pressure, wind speed/direction, relative humidity, and precipitation. This site also includes two digital cameras that take 10-minute still images.




Pollutant	Condition	2023	2024	2025
O ₃	Max. 8-hr O ₃ Average (PPM)	0.076*	0.077*	0.067
	O ₃ # Daily Exceedances > 0.070 PPM	5	5	0
	O ₃ 3-year Design Value (PPM)	0.069†	0.071†	0.069†
PM ₁₀	Max. 24-hr PM ₁₀ Average (µg/m ³)	260*	201*	450*
	Number of exceedances 24-hr PM ₁₀	2†	1†	2†
	Annual PM ₁₀ Average (µg/m ³)	24.7‡	26.4‡	30.0‡

* Indicates an exceedance of the NAAQS

† Indicates exceptional events concurrence requested at this site and no Regional EPA assessment to date.

‡ The annual average values include exceptional events data that has not been concurred by EPA.

Sacaton (Sac), TT-614-7001 (Tribal Monitor)

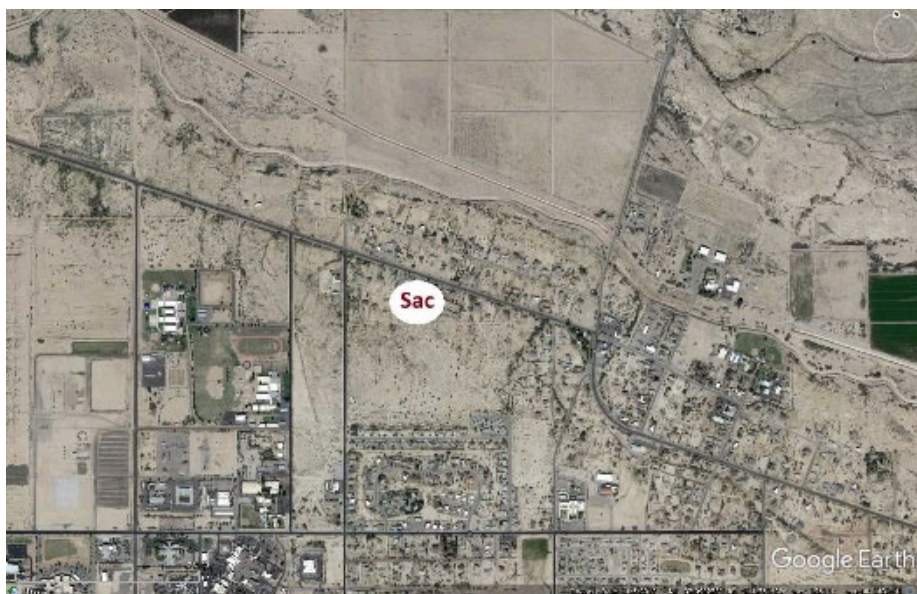

Location: 291 W. Casa Blanca Rd., Sacaton, AZ 85147

Spatial Scale: Urban (O₃) and Neighborhood (PM₁₀)

Monitoring Type: Population Exposure

Site Description: This site has been operational since 2002. This Tribal Monitoring location monitors for Ozone and PM₁₀. The spatial scale for the Sacaton site is *Neighborhood* for PM₁₀ and *Urban Scale* for Ozone. It is located in a community residential area. This site operates one gaseous ozone analyzer and one continuous PM₁₀ monitor that are both FEM instruments. Meteorological monitors operating at this site include: ambient temperature, barometric pressure, wind speed/direction, relative humidity, and precipitation. This site also includes two digital cameras that take 10 minute still images.




Pollutant	Condition	2023	2024	2025
O ₃	Max. 8-hr O ₃ Average (PPM)	0.076*	0.079*	0.070
	O ₃ # Daily Exceedances > 0.070 PPM	8	5	0
	O ₃ 3-year Design Value (PPM)	0.069†	0.071†	0.070†
PM ₁₀	Max. 24-hr PM ₁₀ Average (µg/m ³)	256*	116*	604*
	Number of exceedances 24-hr PM ₁₀	1†	0	2‡
	Annual PM ₁₀ Average (µg/m ³)	28.9‡	30.7	35.3‡

* Indicates an exceedance of the NAAQS

† Indicates exceptional events concurrence requested at this site and no Regional EPA assessment to date.

‡ The annual average values include exceptional events data that has not been concurred by EPA.

Casa Blanca (CB), TT-614-7004 (Tribal Monitor)

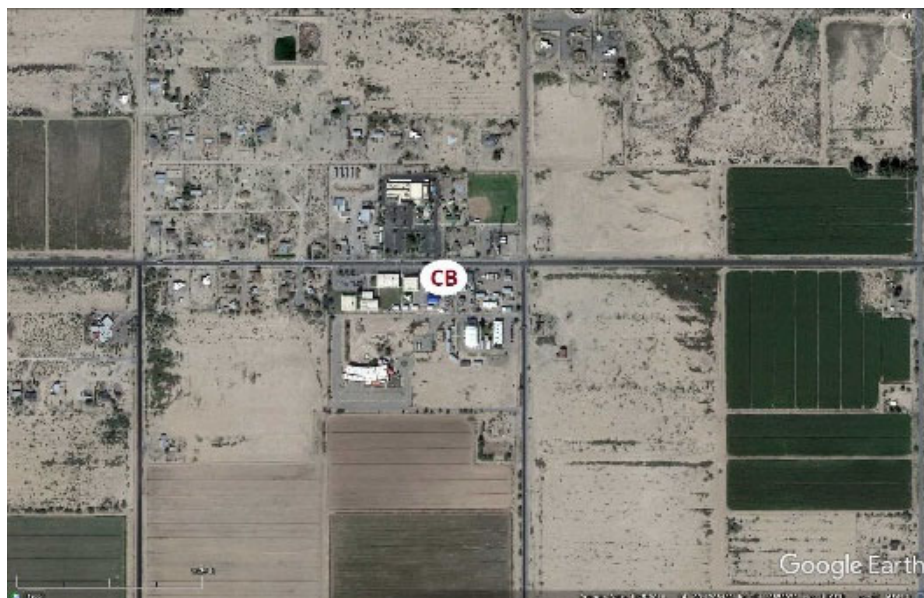

Location: 3455 W. Casa Blanca Road
Bapchule, AZ 85121

Spatial Scale: Neighborhood

Monitoring Type: Population Exposure, Highest concentration (PM₁₀)

Site Description: This site has been operational since 2002. This Tribal Monitoring location monitors for PM₁₀. The spatial scale for the Casa Blanca site is *Neighborhood*. It is located in a residential area and within a community elementary school property. This site operates one continuous PM₁₀ monitor that is a FEM instrument. Meteorological monitors operating at this site include: ambient temperature, barometric pressure, wind speed/direction, relative humidity, and precipitation. In addition, this site operates two digital cameras that take images every 10 minutes.



Pollutant	Condition	2023	2024	2025
PM ₁₀	Max. 24-hr PM ₁₀ Average (µg/m ³)	216*	177*	353*
	Number of exceedances 24-hr PM ₁₀	1†	1†	6†
	Annual PM ₁₀ Average (µg/m ³)	34.5‡	39.3‡	43.5‡

* Indicates an exceedance of the NAAQS

† Indicates exceptional events concurrence requested at this site and no Regional EPA assessment to date.

‡ The annual average values include exceptional events data that has not been concurred by EPA.

Appendix B EPA-Required Site Metadata

Detailed information includes: compliance information regarding air monitoring technical specifications found in 40 CFR §58.10 and Appendices A, C, D, and E (QA, monitoring methods, network design, and monitor siting)

Site Schematic Descriptions

Analysis Method (filter samples only) refers to the method used to process and analyze PM and Pb filter samples.

Distance from Supporting Structure refers to those sample probes that are attached to a supporting structure, such as the side of a building. In most cases the sample probe is located above the supporting structure, in which case the entry will show as “N/A”, aka not applicable.

Distance from Obstructions refers to those obstructions, both on the roof and off the roof, which are located higher than the probe. In the case of a nearby obstruction being higher than the probe, details of its location will be listed in the entry. If there are no obstructions higher than the probe, then the entry will be N/A.

Date of Annual Performance Evaluation refers to the last 2025 QA audit on the gaseous analyzers. These evaluations are performed by the GRIC’s QA personnel. Twenty-five percent of the monitors operating within each gaseous pollutant’s network are evaluated quarterly; thereby, each monitor is evaluated at least once per year as per 40 CFR Part 58, Appendix A, §3.1.2.

Date of Semi-Annual Flow Rate Audit refers to the last 2025 QA audit on PM monitors as per 40 CFR Part 58, Appendix A, §§ 3.2.4 and 3.3.4, respectively. These evaluations are performed by the GRIC’s QA personnel at least once every six months.

Probe Sample Line Material refers to the material makeup of the intake sample lines.

Pollutant Sample Residence Time refers to the amount of time that it takes a sample of air to travel between the probe inlet and the bulkhead of the analyzer. This residence time is calculated by a formula that is based on the sample line’s diameter and length, and the flow rate of the air intake. It is important to keep residence time low to prevent gases in the air sample from reacting with the sample line material or with other gases in the sample; i.e., O₃ could react with nitrogen oxides in the sample if the residence time exceeds 20 seconds.

Traffic Count (ADT) refers to average daily traffic of nearest major road of monitor. This number accounts for two way traffic and was pulled from the Maricopa Association of Governments (MAG) website: [Transportation Data Management System \(ms2soft.com\)](https://www.ms2soft.com).

St. Johns

GRIC ID: SJ

AQS ID: TT-614-7003 (Tribal Monitor Code)

Address: 4665 W. Pecos Rd., Laveen Village, AZ 85339

Coordinates: N 33° 17' 25.05", W 112° 09' 37.74"; (elevation 1057 ft)

- General Information		
Pollutant (parameter code)	O ₃ (44201)	PM ₁₀ (81102)
Parameter Occurrence Code (POC)	1	1
Sampling Schedule	Continuous	Continuous
Analysis Method (filters only)	N/A	N/A
Any Proposal to Remove or Move Monitor?	No	No
Is site suitable for comparison to PM _{2.5} NAAQS per Part 58.30?	N/A	N/A
-Appendix A Requirements		
# Precision Checks Performed Annually	16	25
# Accuracy Audits Performed Annually & Date of Last Check on Gaseous Analyzers & Last Two Checks for PM	2, 10/10/2025	3, 6/25 & 10/10/2025
All Precision/Accuracy Reports Submitted to AQS?	Yes	Yes
Annual Data Certification Submitted	April 15, 2026	April 15, 2026
Frequency of One-Point QC Check	Bi-Weekly	N/A
Frequency of Flow Rate Verification	N/A	Bi-Weekly
-Appendix C Requirements		
Sampler Make & Model (method code)	TAPI T400 (087)	TEOM 1405 (079)
Date Established	03/24/2003	01/01/2013
Monitor Type	Tribal	Tribal
Method (FRM, FEM, ARM)	FEM	FEM
-Appendix D Requirements		
Site Type	Population Exposure	Populations Exposure
Basic Monitoring Objective	NAAQS Comparison	NAAQS Comparison
Monitoring Scale	Urban	Neighborhood
Sampling Season	April - October	January – December
Network Meets Minimum Number of Monitors Required?	Yes	Yes
-Appendix E Requirements		
Distance between collocated samplers	N/A	N/A
Probe Inlet Height	4.6 meters	4.7 meters
Airflow Arc	360 degree	360 Degree
Probe Sample Line Material for reactive gases	Teflon	NA
Pollutant Sample Residence Time	3.18 seconds	NA
Distance from Supporting Structure	NA	NA
Distance from Obstructions	43 meters (building, below probe)	43 meters (building, below probe)
Distance to Furnace Flue	None	None
Spacing from Trees	19 meters	21 meters
Nearest Major Roadway	Pecos Road	Pecos Road
Distance and Direction to Road	17 meters, North	19 meters, North
Traffic Count (ADT)	2706 (2023)	2706 (2023)
Groundcover	Pavement and decomposed granite	Pavement and decomposed granite

Sacaton

GRIC ID: Sac

AQS ID: TT-614-7001 (Tribal Monitor Code)

Address: 291 W. Casa Blanca Rd., Sacaton, AZ 85147

Coordinates: N 33° 04' 53.82", W 111° 45' 08.02"; (elevation 1289 ft)

- General Information		
Pollutant (parameter code)	O ₃ (44201)	PM ₁₀ (81102)
Parameter Occurrence Code (POC)	1	1
Sampling Schedule	Continuous	Continuous
Analysis Method (filters only)	N/A	N/A
Any Proposal to Remove or Move Monitor?	No	No
Is site suitable for comparison to PM _{2.5} NAAQS?	N/A	N/A
-Appendix A Requirements		
# Precision Checks Performed Annually	18	25
# Accuracy Audits Performed Annually & Date of Last Check on Gaseous Analyzers & Last Two Checks for PM	3, 10/09/2025	3, 6/19/2025 & 10/09/2025
All Precision/Accuracy Reports Submitted to AQS?	Yes	Yes
Annual Data Certification Submitted	April 15, 2026	April 15, 2026
Frequency of One-Point QC Check	Bi-Weekly	N/A
Frequency of Flow Rate Verification	N/A	Bi-Weekly
-Appendix C Requirements		
Sampler Make & Model (method code)	TAPI T400 (087)	TEOM 1405 (079)
Date Established	07/01/2002	01/01/2013
Monitor Type	Tribal	Tribal
Method (FRM, FEM, ARM)	FEM	FEM
-Appendix D Requirements		
Site Type	Population Exposure	Population Exposure
Basic Monitoring Objective	NAAQS Comparison	NAAQS Comparison
Monitoring Scale	Urban	Neighborhood
Sampling Season	April – October	January – December
Network Meets Minimum Number of Monitors Required?	Yes	Yes
-Appendix E Requirements		
Distance between collocated samplers	N/A	N/A
Probe Inlet Height	4.6 meters	4.7 meters
Airflow Arc	360 degree	360 Degree
Probe Sample Line Material for reactive gases	Teflon	NA
Pollutant Sample Residence Time	2.97 seconds	NA
Distance from Supporting Structure	NA	NA
Distance from Obstructions	17 meters (tree to NE, 2 meters above probe)	17 meters (tree to NE, 2 meters above probe)
Distance to Furnace Flue	None	None
Spacing from Trees	17 meters	17 meters
Nearest Major Roadway	Casa Blanca Rd	Casa Blanca Rd
Distance and Direction to Road	153 meters, North	153 meters, North
Traffic Count (ADT)	4,646 (2023)	4,646 (2023)
Groundcover	Gravel and natural soil	Gravel and natural soil

Casa Blanca

GRIC ID: CB
 AQS ID: TT-614-7004 (Tribal Monitor Code)
 Address: Casa Blanca/ Preschool Road, Bapchule, AZ 85221
 Coordinates: N 33° 07' 03.14", W 111° 53' 08.93"; (elevation 1209 ft)

- General Information	
Pollutant (parameter code)	PM ₁₀ (81102)
Parameter Occurrence Code (POC)	3
Sampling Schedule	Continuous
Analysis Method (filters only)	N/A
Any Proposal to Remove or Move Monitor?	No
Is site suitable for comparison to PM _{2.5} NAAQS per Part 58.30?	N/A
-Appendix A Requirements	
# Precision Checks Performed Annually	26
# Accuracy Audits Performed Annually & Date of Last Two Checks for PM ₁₀	3, 6/27 & 10/24/2026
All Precision/Accuracy Reports Submitted to AQS?	Yes
Annual Data Certification Submitted	April 30, 2025
Frequency of One-Point QC Check	N/A
Frequency of Flow Rate Verification	Bi-Weekly
-Appendix C Requirements	
Sampler Make & Model (method code)	TEOM 1405 (079)
Date Established	July 1, 2002
Monitor Type	Tribal
Method (FRM, FEM, ARM)	FEM
-Appendix D Requirements	
Site Type	Population Exposure
Basic Monitoring Objective	NAAQS Comparison
Monitoring Scale	Neighborhood
Sampling Season	January - December
Network Meets Minimum Number of Monitors Required?	Yes
-Appendix E Requirements	
Distance between collocated samplers	N/A
Probe Inlet Height	4.7 meters
Airflow Arc	360 Degree
Probe Sample Line Material for reactive gases	NA
Pollutant Sample Residence Time	NA
Distance from Supporting Structure	NA
Distance from Obstructions	20 meters (canopy/ shade to southeast, 2 meters above probe)
Distance to Furnace Flue	NA
Spacing from Trees	9 meters (tree to East, 2 meters above probe)
Nearest Major Roadway	Casa Blanca Road
Distance and Direction to Road	21 meters, to north
Traffic Count (ADT)	5,162 (2023)
Groundcover	Pavement and gravel

Appendix C EPA Approvals

- Approval of O₃ Seasonal Waiver for St. Johns and Sacaton O₃ Monitors dated January 14, 2025.
- EPA Letter of Approval for GRIC's 2024 Air Monitoring Network Review and 2025 Plan, includes:
 - EPA Response / Approval Cover Letter dated December 5, 2025.
 - 2024 Annual Monitoring Network Plan Checklist for GRIC Performing Regulatory Monitoring (Not attached).

DRAFT

Figure C-1. Approval of O₃ Seasonal Waiver for St. Johns and Sacaton O₃ Monitors dated January 14, 2025.

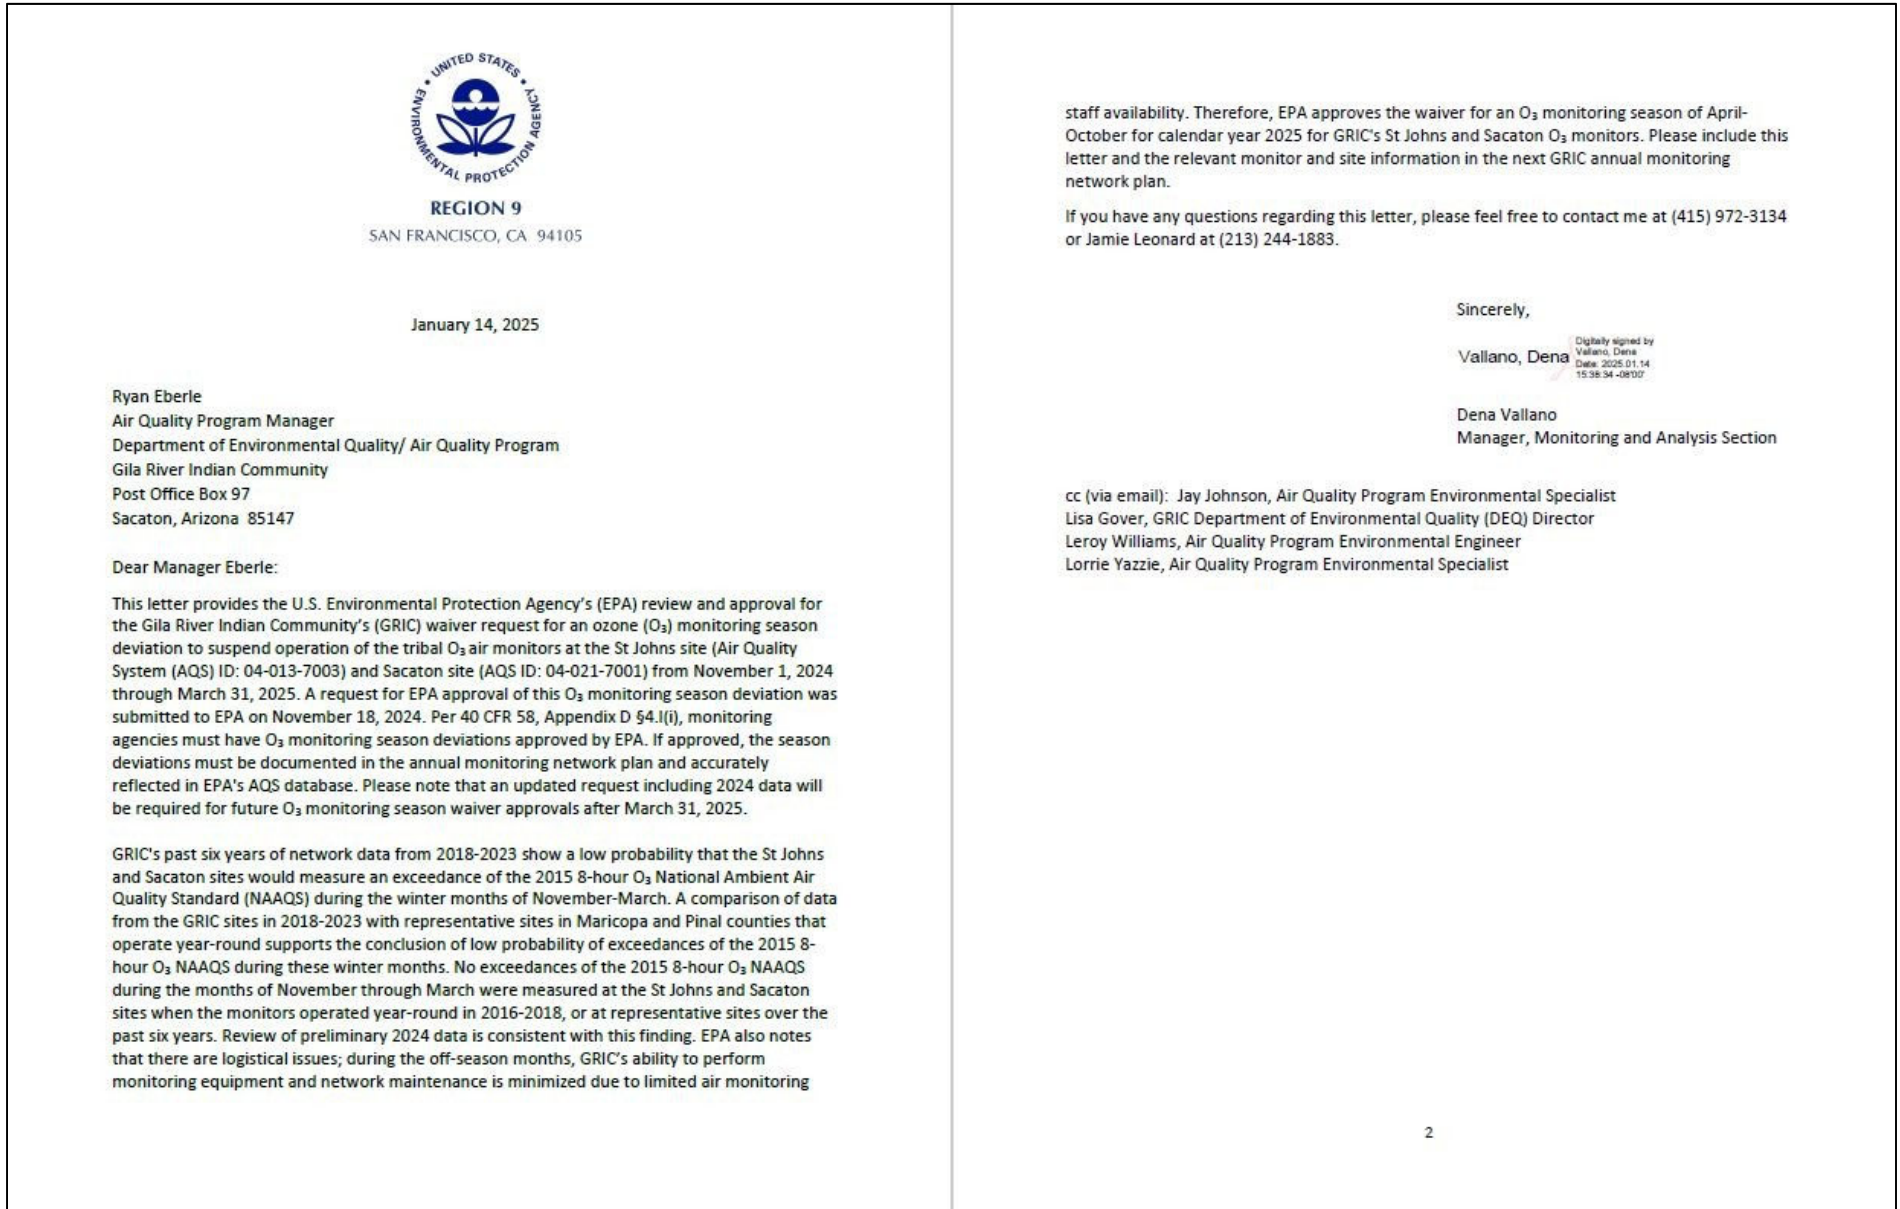


Figure C-2. EPA Letter of Approval for GRIC’s 2024 Air Monitoring Network Review and 2025 Plan dated December 5, 2025.



Appendix D Public Notice and Comment Information

1. Figure D-1. Public Notice Flyer
2. Figure D-2. Public Meeting PowerPoint Presentation Slides and Handouts (*6 pages*)
3. Figure D-3. Public Meeting Handout (*3 page FAQ Sheet*).
4. Table D-1. Public comments and questions received.

DRAFT

Figure D-1. Public Notice Flyer

DRAFT

Gila River Indian Community Department of Environmental Quality Public Notice

Pursuant to 40 Code of Federal Regulations (CFR) §58.10 Gila River Indian Community (GRIC) Department of Environmental Quality (DEQ) Air Quality Program (AQP) will make its annual monitoring network plan available for public inspection prior to submission to the United States Environmental Protection Agency. The Annual Ambient Monitoring Network Review and Data Summary present changes to and data collected from the air quality monitoring network during calendar year 2025. This document will be available for review at the GRIC DEQ office located at 124 Skill Center Dr., Sacaton, AZ 85147, and on the AQP website at www.gricdeq.org under Public Notices.

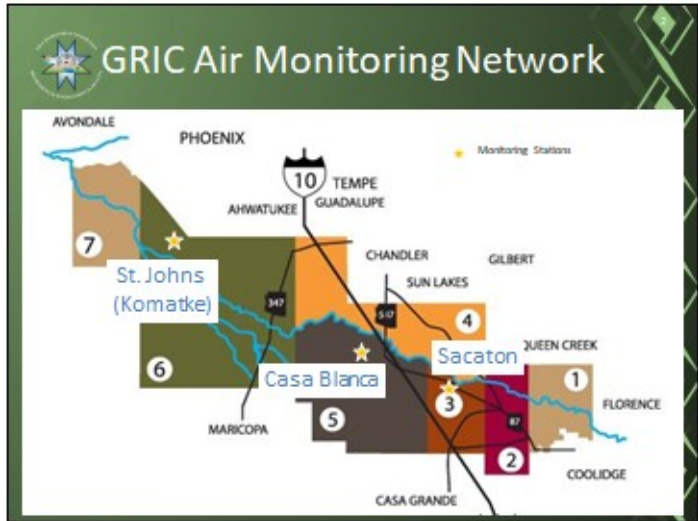
Public comments may be submitted in writing to GRIC DEQ Air Quality, P.O. Box 2139, Sacaton, Arizona, 85147. For additional information, please contact Jay Johnson at 520-796-3783 or email air@gric.nsn.us.



Figure D-2. Public Meeting PowerPoint Presentation Slides and Handouts (6 pages):

DRAFT

2025 GRIC Air Monitoring Network Review

- ## Air Monitoring Network Plan
- Requirement for Regulatory Monitoring
 - Includes
 - Description of Air Monitoring Network (AMN)
 - Review of 2025 Performance/Data/Changes
 - Recommendations for 2026 Network Changes
 - Requires 30-Day Public Comment Period
 - Plan due to US EPA by July 1, 2026

- ## 2025 Summary
- 95-100% Data Completeness (Valid Data)
 - Seasonal Monitoring for Ozone
 - April – October
 - No changes to monitoring network
 - Procured new equipment
 - 5-Year Assessment Plan




2026 Activities

- Continue Seasonal Ozone Monitoring – April – October
- Installing new monitoring equipment
- Training and onboarding staff
- Priority goal is a fully staffed Air Quality Program



What Is PM10?

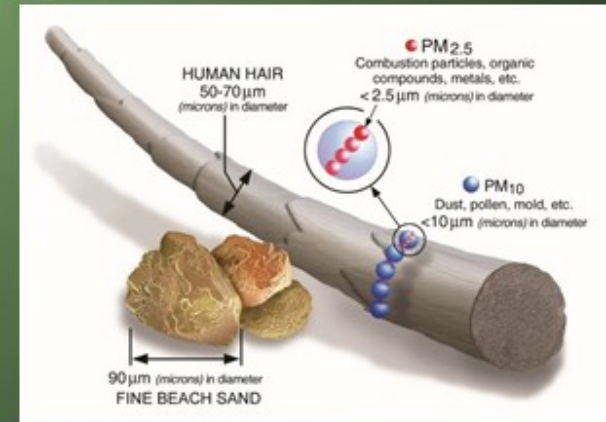

The Air Quality Index (AQI)




Note: Hazardous is extremely rare and not included in the Flag Program





- Indicator of how clean (or polluted) the air is
- Colors associated with health affects/action steps
- Orange ~ Exceedance of National Ambient Air Quality Standard (NAAQS)





2025 PM10 Results

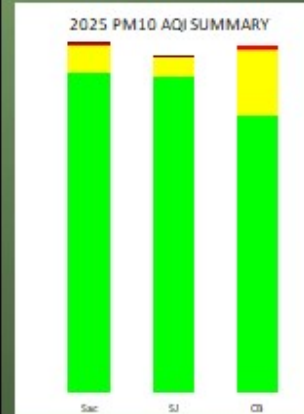

- Most days good/moderate
- Casa Blanca has more moderate days

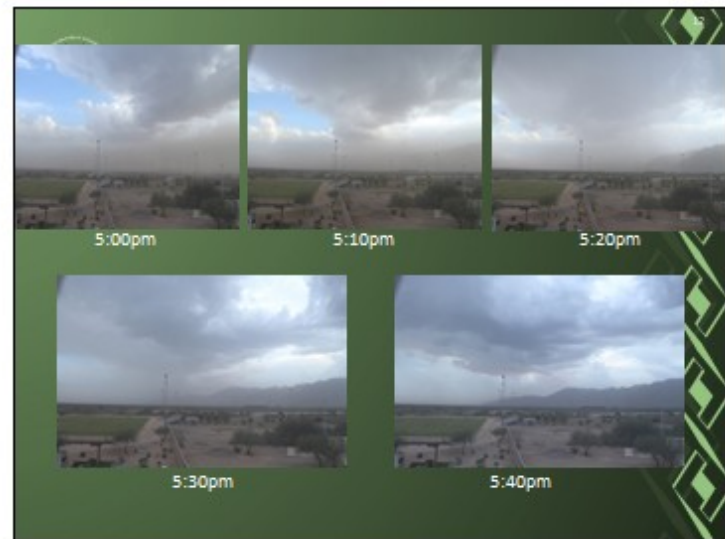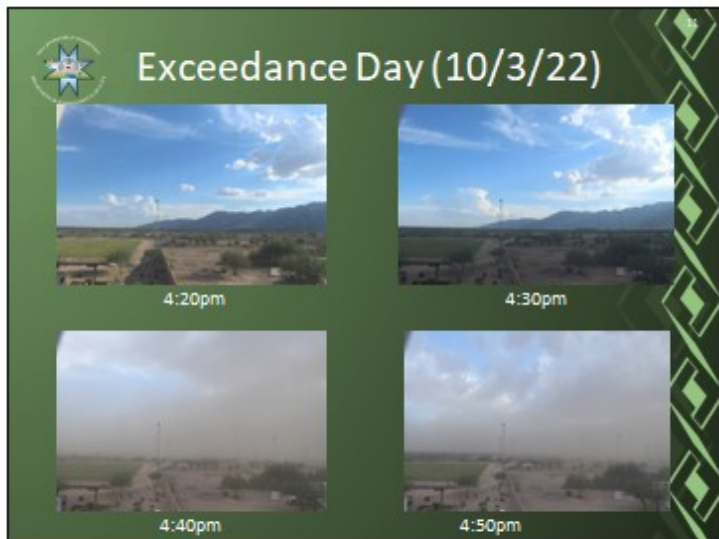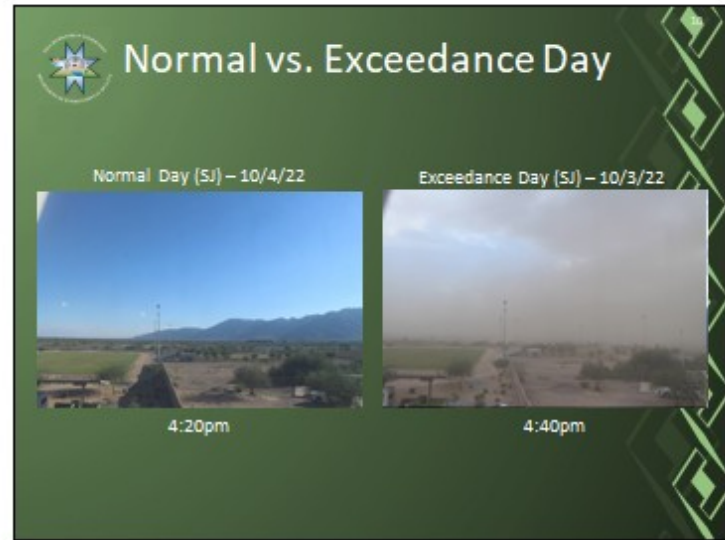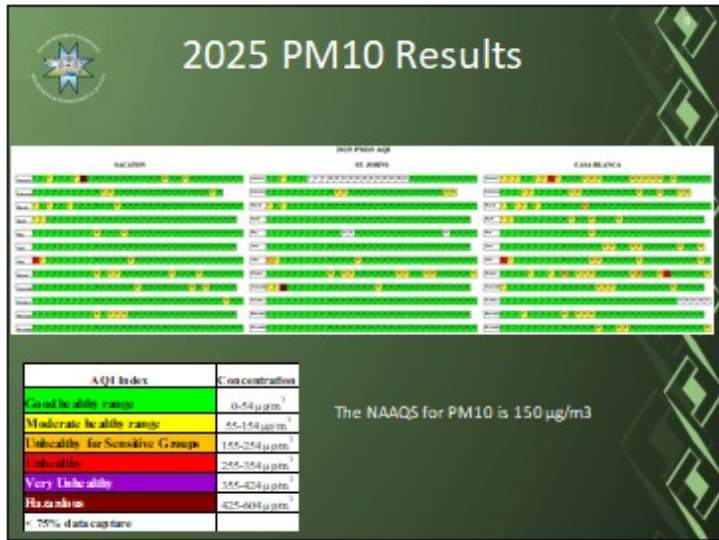

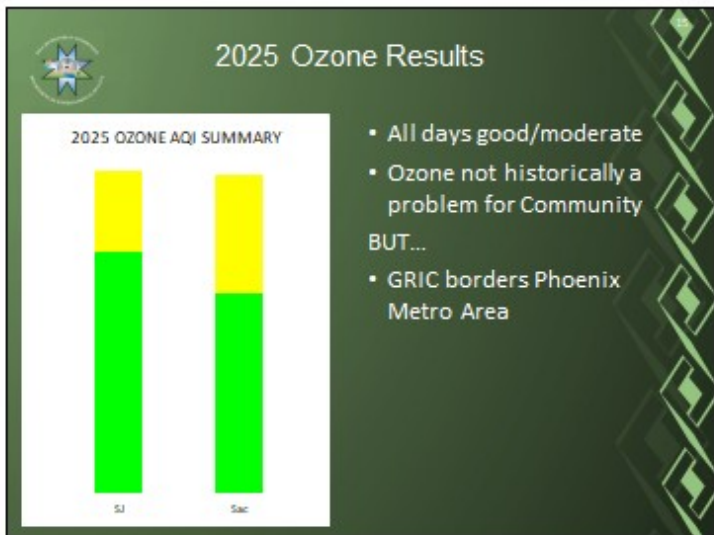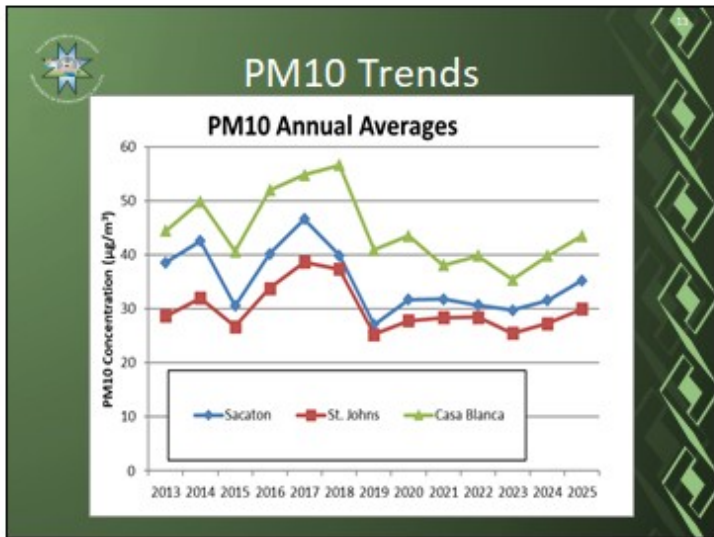


2025 Ozone Results

ST. JOHNS	2025 Ozone AQI	SACATON
Jan	100	100
Feb	100	100
Mar	100	100
Apr	100	100
May	100	100
Jun	100	100
Jul	100	100
Aug	100	100
Sep	100	100
Oct	100	100
Nov	100	100
Dec	100	100

AQI Index	Concentration
Good healthy range	0 - 0.054 ppm
Moderate healthy range	0.055 - 0.070 ppm
Unhealthy for Sensitive Groups	0.071 - 0.085 ppm
Unhealthy	0.086 - 0.105 ppm
< 75% data capture	

The NAAQS for Ozone is 0.070 ppm

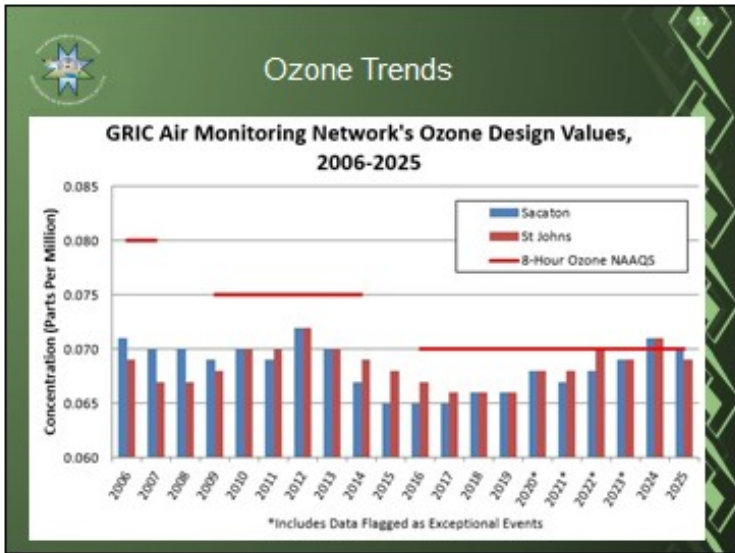

Realtime Air Quality Info

www.airnow.gov | AirNow | Ambient Air Monitoring | QR | www.gricdeq.com/index2.aspx

	St. Johns	Casa Blanca	Sacaton
Temperature	81.7°	82.7°	84.7°
Humidity	26.7%	26.7%	26.7%
Clouds	8.0%	8.0%	8.0%
Wind Speed	7 mph	7 mph	4 mph
Wind Direction	800	5	800
PM ₁₀ (AQI)	35	35	42
Ozone (AQI)	35	35	32

Air Quality Notifications (Enviroflash)

<http://www.enviroflash.info/signup.cfm>

Need help signing up? Contact:

Tison Gill
 Education/Outreach Specialist
Tison.Gill.DEQ@gric.nsn.us
 520-610-9950

Contact Information

AQP Staff:
 Ryan Eberle
 Jay Johnson
 Lorrie Yazzie
 Mariah Clark
 Ibitola Agangan

DEQ Air Quality Office:
 124 Skill Center Rd.
 Sacaton, AZ 85147
air@gric.nsn.us
www.gricdeq.org

Tison Gill
 Outreach Specialist
 (520) 610-9950
Tison.Gill.DEQ@gric.nsn.us

Figure D-3. Public Meeting Handout (3 page FAQ Sheet):

DRAFT



Gila River Indian Community 2025 Ambient Air Quality Monitoring Network Review FAQ Sheet

What is an Ambient Air Quality Monitoring Network Review?

It is a document that describes the air monitoring network for the Community including monitor types, background information, summary of annual monitoring results, and changes and future recommendations to the monitoring network. This annual document identifies the purpose of each monitor and provides evidence that the operation of each monitor meet the requirements in the Federal Regulations. In other words, it fulfills requirements needed for a regulatory air monitoring program.

What are the pollutants monitored in our network?

GRIC Department of Environmental Quality (DEQ) Air Quality Program(AQP) operates air quality monitors that record ambient concentrations of two criteria air pollutants- particulate matter less than or equal to 10 microns (PM₁₀) and ozone (O₃).

What are Criteria Air Pollutants?

Criteria Air Pollutants are those that the United States Environmental Protection Agency (EPA) has defined as a potential risk to human health and the environment. These six common air pollutants include particulate matter, ground-level ozone, carbon monoxide, lead, sulfur dioxide, and nitrogen dioxide. Due to the health risks of these pollutants, EPA has set National Ambient Air Quality Standards (NAAQS) for them.

Why do we only monitor two of the six criteria air pollutants?

The Clean Air Act (CAA) requirements are designed for high population areas and emission sources. Consequently, GRIC and other tribes do not fit all of the CAA monitoring requirements. Furthermore, tribes are not required to conduct ambient air monitoring. GRIC does not monitor for these pollutants because they have been found, through discrete sampling and emission inventories, to be at background ambient (outdoor) air quality concentrations. Additionally, GRIC does not have major stationary pollution sources that emit these particular criteria pollutants that may significantly affect the NAAQS within GRIC jurisdiction.

What is the NAAQS?

The National Ambient Air Quality Standards (NAAQS) are intended to protect public health and welfare by setting limits on the allowable level of each criteria pollutant in the ambient air. These standards, also known as public health standards, were developed through scientific-based studies that indicate the level or amount of air in which the public can safely breathe. The NAAQS for Ozone (O₃) is 0.070 parts per million (ppm) based on the annual fourth-highest daily maximum 8-hr concentration, averaged over 3 years. The NAAQS for PM₁₀ is to not exceed 150 micrograms per cubic meter (µg/m³) more than once per year on average over 3 years.

What is Particulate Matter?

It is particle pollution that comes from many different types of sources. Coarse particles (between 2.5 and 10 micrometers) that GRIC monitors come from crushing and grinding operations, road dust, and agricultural operations. Particulate matter can be a problem at any time of the year and can cause serious health problems (asthma attacks, heart attacks, and strokes).

www.gricdeq.org



What is Ozone?

Ozone is a colorless gas found in the air we breathe. Ozone can be good or bad, depending where it occurs. Good ozone is present in the Earth's upper atmosphere shielding us from the sun's harmful ultraviolet rays. Bad ozone is present at ground level, where we breathe, because it can harm human health. Ozone forms when two types of pollutants (VOCs and NO_x) react in sunlight, usually on hot summer days. These pollutants come from sources such as vehicles, industries, power plants, and products like solvents and paints.

Where are the GRIC ambient air monitors located?

There are currently three permanent ambient air monitoring stations within the Community.

1. St. Johns (SJ) (District 6) - located in a residential area within Gila Crossing Community School property. This site location monitors for Ozone and PM₁₀.
2. Casa Blanca (CB) (District 5) - located in a residential area within the former Casa Blanca Community School property. This site location monitors for PM₁₀.
3. Sacaton (Sac) (District 3) - located within the GRIC Office of Land Use Planning and Zoning. This site location monitors for Ozone and PM₁₀.


Meteorological data is collected at all three air monitoring sites which include measurements of ambient temperature, barometric pressure, wind speed/direction, relative humidity, and precipitation.

Why are they located there?

Air monitoring sites are strategically based throughout the Community to provide data that meets monitoring objectives: Highest Concentrations, Population Exposure, Source Impacts, Background Concentrations, Regional Transport, and Welfare Impacts. For example, the Casa Blanca site analyzes for PM₁₀ in the agricultural center of the Community and all three monitors are placed in locations within the highest population centers on the Community.

How does the 2024 Ozone monitoring data compare with previous years' data?

Compliance with the ozone NAAQS is determined by averaging the annual fourth highest concentration for the previous three years. The 4th highest concentration in 2025 was 0.067 ppm for Sacaton and 0.065 ppm for St. Johns. Therefore, the average of the 4th highest values over the last three years is 0.070 ppm for Sacaton and 0.069 ppm for St. Johns. As shown in the right figure below, the ozone design value had been trending upward since 2020 but last year did show a decrease; additionally, it's important to note that design values include days that may have been impacted by exceptional events (e.g., wildfires).


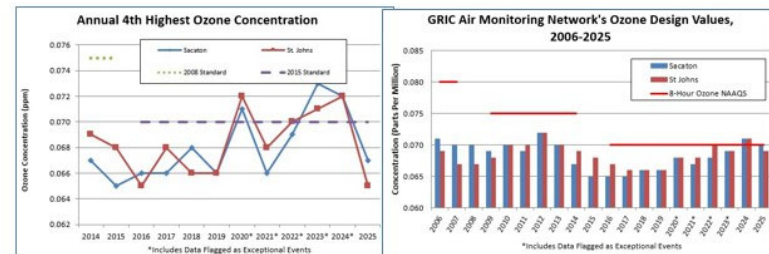


www.gricdeq.org



How does the 2024 PM₁₀ monitoring data compare with previous years' data?

Looking at the PM₁₀ graphs below, one can see the PM₁₀ annual average concentrations are trending upward but significantly lower than 2016-2018. There was six exceedances at Casa Blanca in 2025 and two exceedances each from Sacaton and St. Johns. In order to be compliant with the PM₁₀ NAAQS, each monitoring site must not have more than one daily exceedance per year over a three-year period. The three-year average exceedance is known as the design value. From 2013 to 2022, each of the three sites has a design value greater than one as shown in the chart below. For 2023 and 2025 the design value for Sacaton is 1 and for 2024 it is below 1. It's important to note that both figures below include flagged data for exceptional events in the calculation.

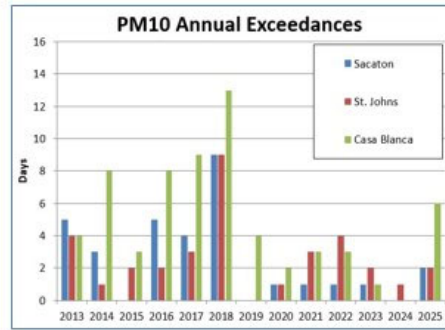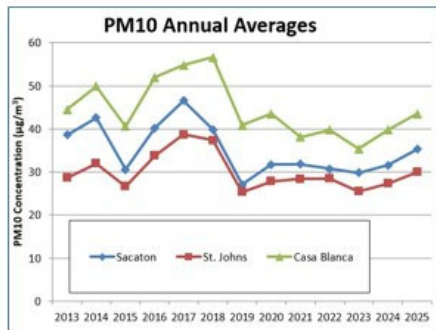

What are Exceptional Events and how do they impact the data?

An exceptional event is uncontrollable and caused by natural sources of pollution or an event that is not expected to recur at a given location. The AQP assesses any exceedances and makes an initial determination whether or not they may have been caused by an exceptional event. Those events that are determined to be exceptional are then flagged by the AQP in the AQS database. If EPA concurs that the events are exceptional, then the exceedances are removed from the calculation to determine compliance with the NAAQS.

Is the air getting cleaner?

This is a difficult question to answer because there are so many variables to factor in from year-to-year. Based on the ozone graphs above, ozone concentrations appear to be on an upward trend. However, ozone on the Community is largely influenced by the Phoenix metropolitan area, commuter traffic through the Community, day of the week, and weather conditions. A period of hot, stagnant air can easily cause ozone concentrations to become elevated. Similarly, PM₁₀ measurements are influenced by weather and local and upwind activities within the area (such as agriculture and construction). A warmer, drier season means less moisture in the soil, which may make smaller soil particles (e.g., PM₁₀) more susceptible to entrainment at lower wind speeds. Based on the PM₁₀ graphs above, the PM₁₀ concentrations appear to be on a stable or downward trend; however, this data also includes the exceptional events.

Can we get a monitor in our district?

Regulatory air quality monitors are expensive to operate and maintain and the EPA continually places additional requirements and responsibilities on air monitoring programs. Additionally, the existing air monitoring stations already exceeds the minimum monitoring objectives outlined in Federal regulations. Therefore, there are currently no plans to expand the monitoring network. In the future, pending the availability of resources, the AQP may be able to conduct short-term informational monitoring in other Districts in the Community.

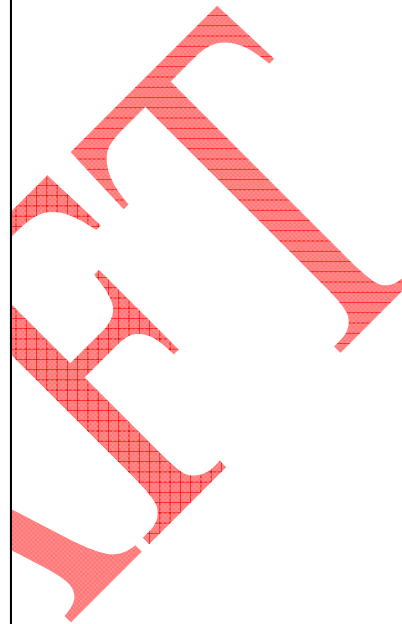


Table D-1. Summary of comments and questions received from GRIC members and visitors.

District	Date	Comments / Questions Received
1	5/18/26	District 1 Community Meeting in-person. <ol style="list-style-type: none"> 1. Does AQP have any authority of the neighboring fields on the border of GRIC? 2. What's the permit/inspector process for your program? 3. What's the process for receiving sensors? Is it from AQP or districts?
2	TBD	District 2 Community Meeting in-person.
3	5/5/26	District 3 Community Meeting in-person with Zoom option available. Presentation made in-person. <ol style="list-style-type: none"> 1. What is the annual budget for your program? Does the money come from tribal funding? 2. Do you monitor for emergencies like chemical spills?
4	TBD	District 4 Community Meeting in-person. <ol style="list-style-type: none"> 1.
5	5/18/26	District 5 Community Meeting in-person. <ol style="list-style-type: none"> 1. Would planting trees help with the air quality?
6	5/4/26	District 6 Community Meeting in-person. <ol style="list-style-type: none"> 1. Does the Community keep track of vehicle counts from the MVD 2. What are the condition of the monitoring stations? Are there any plans to procure new ones? 3. Are you going to replace the monitoring stations (do you need funding to replace equipment/shelters)?
7	5/4/26	District 7 Community Meeting in-person. <ol style="list-style-type: none"> 1. With more traffic coming through District 7 is there a health concern? 2. Have you worked with GRHC on seeing if there is any relation? 3. Are we able to have an air monitoring station in D7 due to the traffic?